
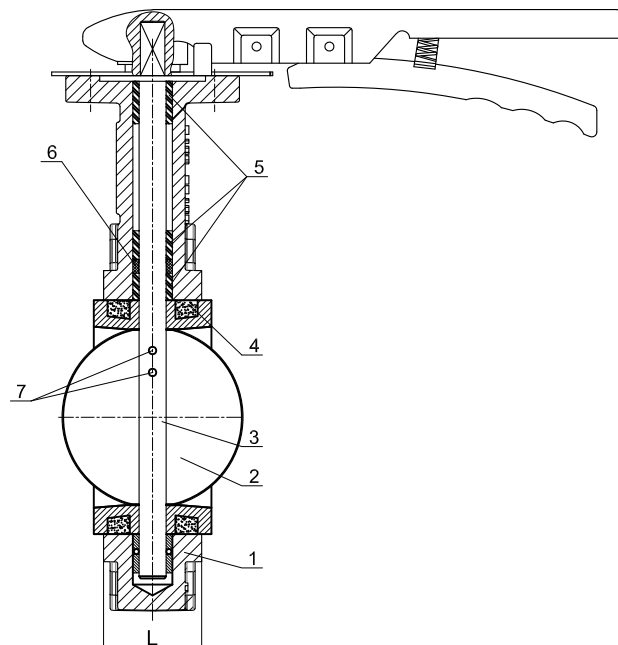


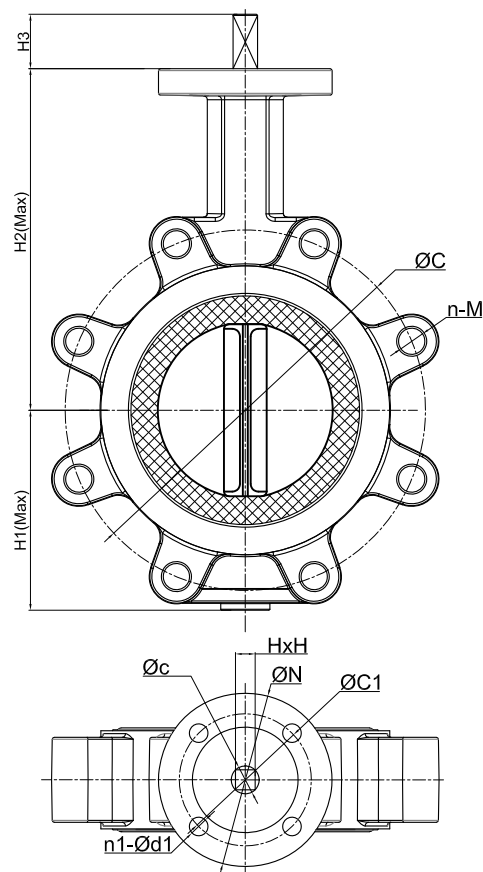

Specification:

- 1.General: API609
- 2.Face to face: DIN3202-K1
- 3.Inspection and test: API 598
- 4.Mounting pad: ISO 5211
- 5.Flange drill: EN1092-2 PN16

DN	L	EN1092-2 PN16		H1±5 (Max)	H2±5 (Max)	H3	ISO5211				H
		ΦC	n-M				TOP	ΦN	ΦC1	n1-Φd1	
50	43	125	4-M16	57	143	29	F05	65	50	4-Φ8	9
65	46	145	4-M16	68	155	29	F05	65	50	4-Φ8	9
80	46	160	8-M16	82	160	29	F05	65	50	4-Φ8	9
100	52	180	8-M16	100	181	29	F07	90	70	4-Φ10	11
125	56	210	8-M16	112	194	29	F07	90	70	4-Φ10	14
150	56	240	8-M20	126	202	29	F07	90	70	4-Φ10	14
200	60	295	12-M20	162	240	35	F10	125	102	4-Φ12	17
250	68	350	12-M24	193	272	35	F10	125	102	4-Φ12	22
300	78	400	12-M24	236.5	318	35	F10	125	102	4-Φ12	22

7	Pin	SS			
6	Seal Ring	EPDM			
5	Bushing	PTFE			
4	Seat	EPDM			
3	Stem	SS420			
2	Disc	DI			
1	Body	CI/DI			
Item		Part name	Material	Q'ty	Remark

DRN	Wang	WEIGHT	MATERIAL		
CHK		SCALE	Butterfly Valve		
APP		DATE			
					B15L-YX
					REV

This document is the property of Huihua Valve Industry Co.
Distribution of this document without the written consent of the owner is strictly forbidden
Failure to comply will incur a liability for damages

http://www.hiwa.cn Website
sales@hiwa.cn Email

86 - 533 - 6077200 Phone
86 - 533 - 6077233 FAX

Huihua Valve Industry co.
No.36 MinAn Road New Hi-Tech Industry
Zone Zibo Shandong China 255088 p.c