


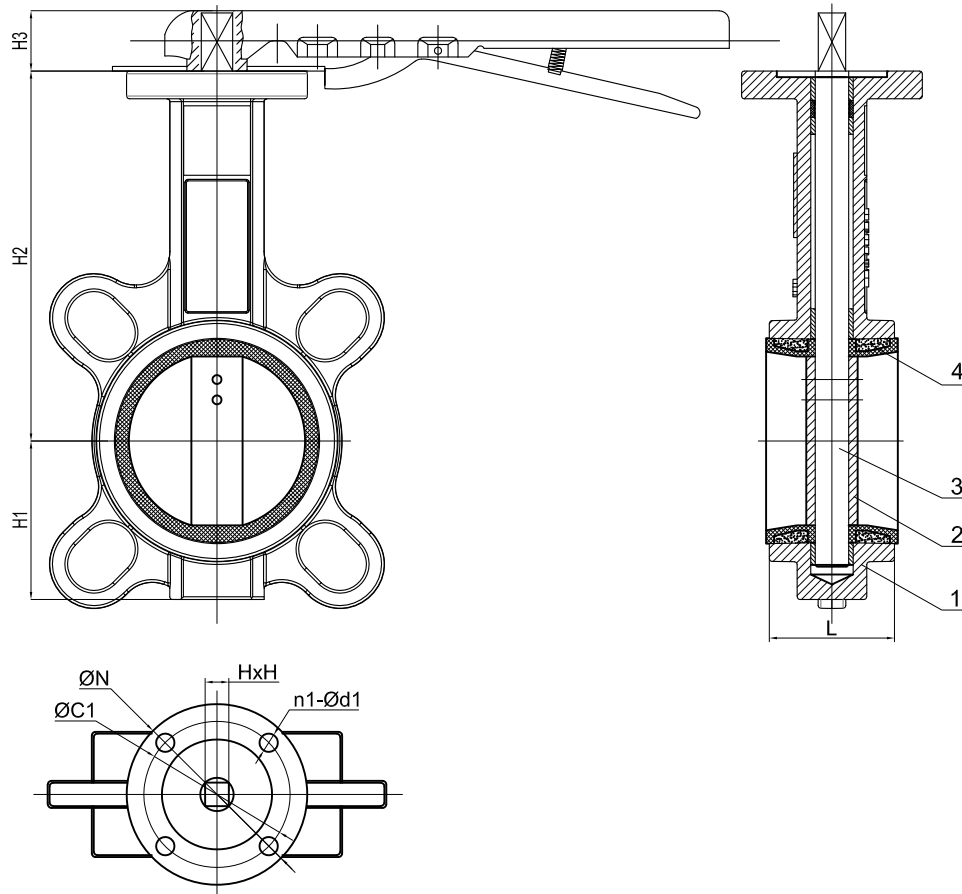

Specification:

- 1.General: API609
- 2.Face to face: DIN3202-K1
- 3.Inspection and test: API 598
- 4.Mounting pad: ISO 5211
- 5.Flange drill: EN1092-2 PN10/16

DN	L	EN1092-2		EN1092-2		H1	H2	H3	ISO5211				H
		PN10		PN16					TOP	ΦN	ΦC1	n1-Φd1	
50	43	125	4-Φ19	125	4-Φ19	57	143	29	F05	65	50	4-Φ8	9
65	46	145	4-Φ19	145	4-Φ19	68	155	29	F05	65	50	4-Φ8	9
80	46	160	8-Φ19	160	8-Φ19	82	160	29	F05	65	50	4-Φ8	9
100	52	180	8-Φ19	180	8-Φ19	100	181	29	F07	90	70	4-Φ10	11
125	56	210	8-Φ19	210	8-Φ19	112	194	29	F07	90	70	4-Φ10	14
150	56	240	8-Φ23	240	8-Φ23	126	202	29	F07	90	70	4-Φ10	14
200	60	295	8-Φ23	295	12-Φ23	162	240	35	F10	125	102	4-Φ12	17
250	68	350	12-Φ23	355	12-Φ28	193	272	35	F10	125	102	4-Φ12	22
300	78	400	12-Φ23	410	12-Φ28	236.5	318	35	F10	125	102	4-Φ12	22

Size	Name	Material	Q'ty	Remark
1	Body	Cast iron		
2	Disc	Ductile iron		
3	Stem	SS420		
4	Seat	EPDM		
DRN	Wang	WEIGHT	MATERIAL	
CHK		SCALE	Butterfly Valve	
APP		DATE		
hiwa			B15W-YX	
			REV	20240720a

This document is the property of Huihua Valve Industry Co.
Distribution of this document without the written consent of the owner is strictly forbidden
Failure to comply will incur a liability for damages

<http://www.hiwa.cn> Website
sales@hiwa.cn Email

86 - 533 - 6077200 Phone
86 - 533 - 6077233 FAX

Huihua Valve Industry co.
No.36 MinAn Road New Hi-Tech Industry
Zone Zibo Shandong China 255088 p.c