
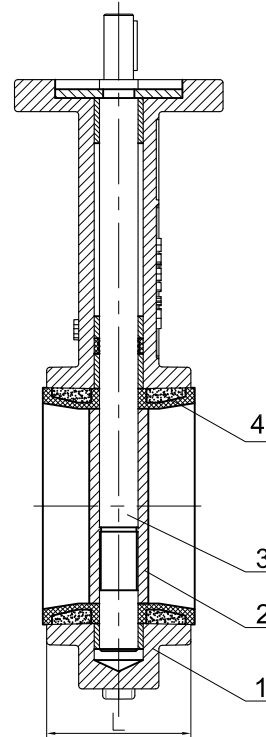


DN	L	EN1092-2 PN16		H±5 (Max)	H1±5 (Max)	H2	ISO5211				Φc
		ΦC	n-Φd				TOP	ΦN	ΦC1	n1-Φd1	
40	33	110	4-19	126	52	29	F05	65	50	4-8	12.6
50	43	125	4-19	143	57	29	F05	65	50	4-8	12.6
65	46	145	4-19	155	68	29	F05	65	50	4-8	12.6
80	46	160	8-19	160	82	29	F05	65	50	4-8	12.6
100	52	180	8-19	181	100	29	F07	90	70	4-10	15.77
125	56	210	8-19	194	112	29	F07	90	70	4-10	18.92
150	56	240	8-23	202	126	29	F07	90	70	4-10	18.92
200	60	295	12-23	240	162	35	F10	125	102	4-12	22.1

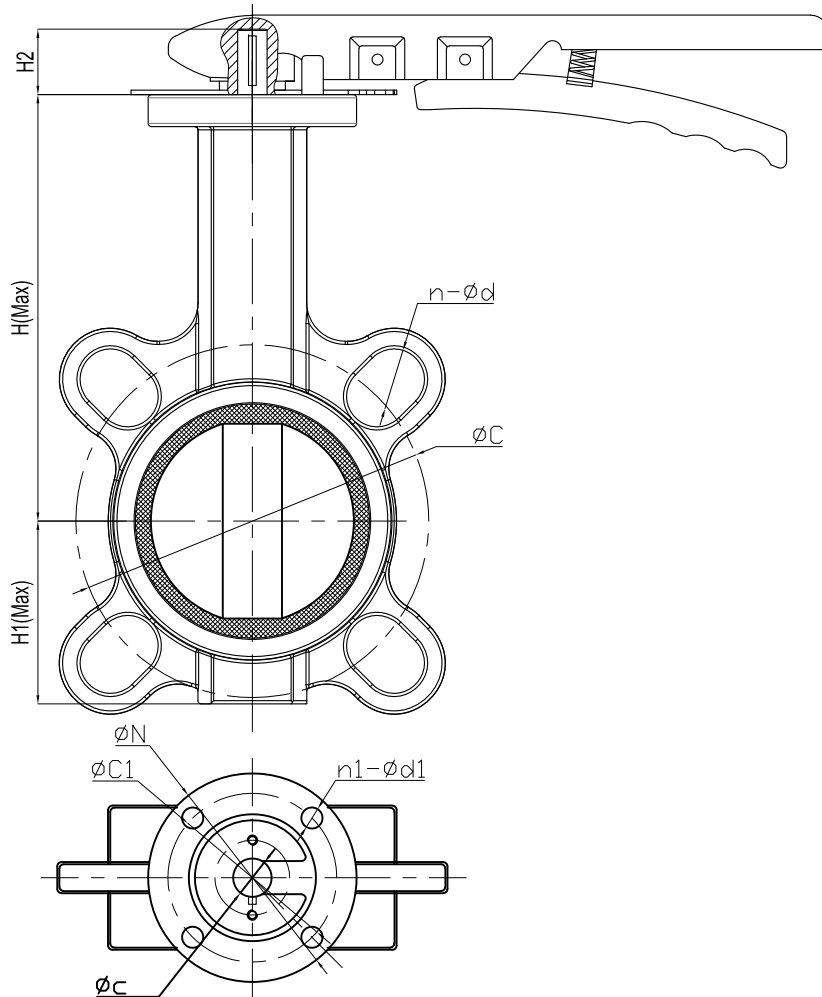

Specification:

- 1.General: ISO 5752
- 2.Face to face: EN558-1 20 series
- 3.Inspection and test: API 598
- 4.Mounting pad: ISO 5211
- 5.Flange drill: EN1092-2 PN16
- 6.Workpressure: PN16

NO.	Name	Material
1	Body	Ductile iron
2	Disc	DI+Ni/SS304
3	Stem	SS416
4	Seat	EPDM

DRN	wang	WEIGHT		MATERIAL	
CHK		SCALE		Butterfly Valve	
APP		DATE	07/20/2024		
hiwa				B15W-HJ	
				REV	20240720a

This document is the property of Huihua Valve Industry Co.
Distribution of this document without the written consent of the owner is strictly forbidden
Failure to comply will incur a liability for damages

http://www.hiwa.cn Website
sales@hiwa.cn Email

86 - 022 - 88629165 Phone
86 - 022 - 88629166 FAX

Huihua Valve Industry co.
No.2 Yingye RD., Huangtai Ind., Park, Xiaozhan Town,
Jinan District, Tianjin City China 300353 p.c