


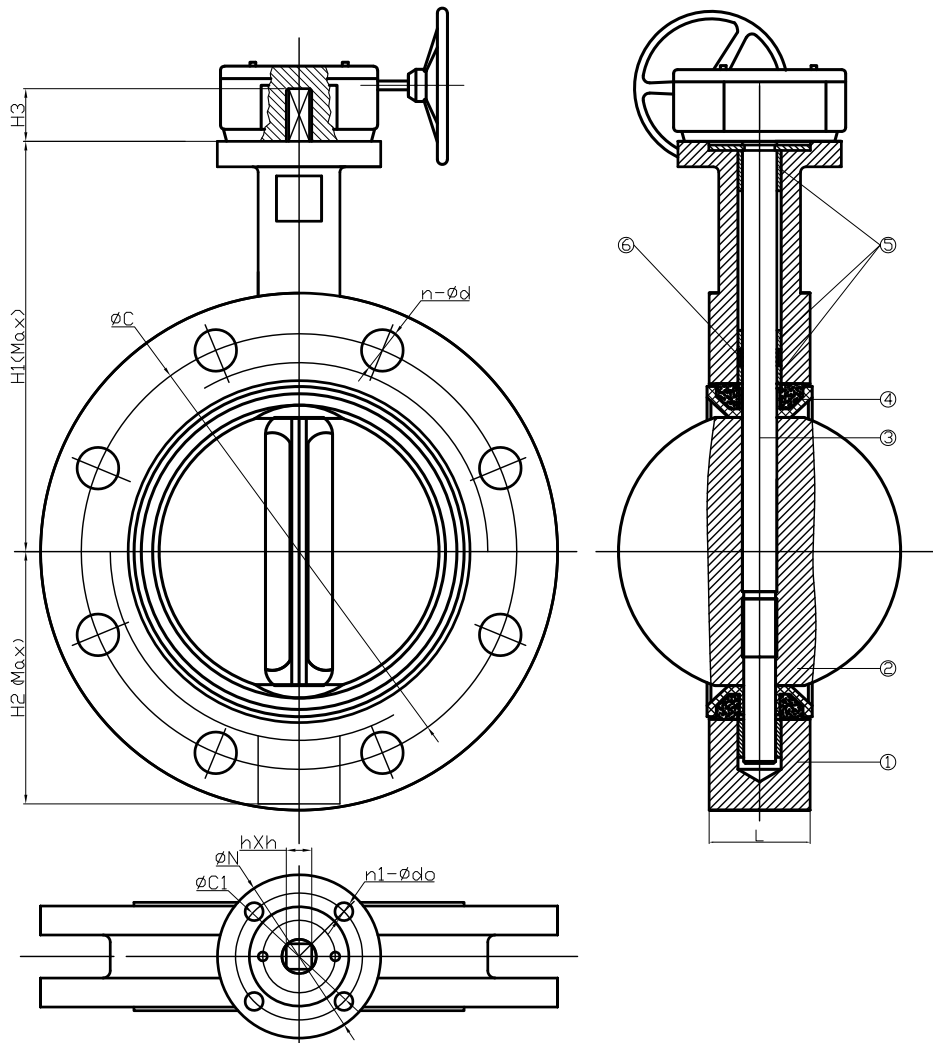

Specification:

- 1.General: API609
- 2.Face to face: DIN3202-K1
- 3.Inspection and test: API 598
- 4.Mounting pad: ISO 5211
- 5.Flange drill: EN1092-2 PN10/16

DN	L	H1±5 (Max)	H2±5 (Max)	H3	EN1092-2 PN10		EN1092-2 PN16		Flange No	ΦN	ΦC1	n1-Φd	hXh
					ΦC	n-Φd	ΦC	n-Φd					
50	43	161	82.5	29	125	4-19	125	4-19	F05	65	50	4-Φ8	9X9
65	46	175	92.5	29	145	4-19	145	4-19	F05	65	50	4-Φ8	9X9
80	46	181	100	29	160	8-19	160	8-19	F05	65	50	4-Φ8	9X9
100	52	200	110	29	180	8-19	180	8-19	F07	90	70	4-Φ10	11X11
125	56	213	125	29	210	8-19	210	8-19	F07	90	70	4-Φ10	14X14
150	56	226	142.5	29	240	8-23	240	8-23	F07	90	70	4-Φ10	14X14
200	60	260	170	35	295	8-23	295	12-23	F10	125	102	4-Φ12	17X17
250	68	292	202.5	35	350	12-23	355	12-28	F10	125	102	4-Φ12	22X22
300	78	337	242	35	400	12-23	410	12-28	F10	125	102	4-Φ12	22X22

6	Seal Ring	EPDM		
5	Bushing	PTFE		
4	Seat	NBR/EPDM		
3	Stem	SS416		
2	Disc	SS304		
1	Body	Ductile Iron		
Item	Part name	Material	Q'ty	Remark
DRN	Wang	WEIGHT	MATERIAL Butterfly Valve	
CHK		SCALE		
APP		DATE07/20/2024		
hiwa			B10U-HJ	
			REV20240720a	

This document is the property of Huihua Valve Industry Co.
Distribution of this document without the written consent of the owner is strictly forbidden
Failure to comply will incur a liability for damages

http://www.hiwa.cn Website
sales@hiwa.cn Email

86 - 533 - 6077200 Phone
86 - 533 - 6077233 FAX

Huihua Valve Industry co.
No.36 MinAn Road New Hi-Tech Industry
Zone Zibo Shandong China 255088 p.c