


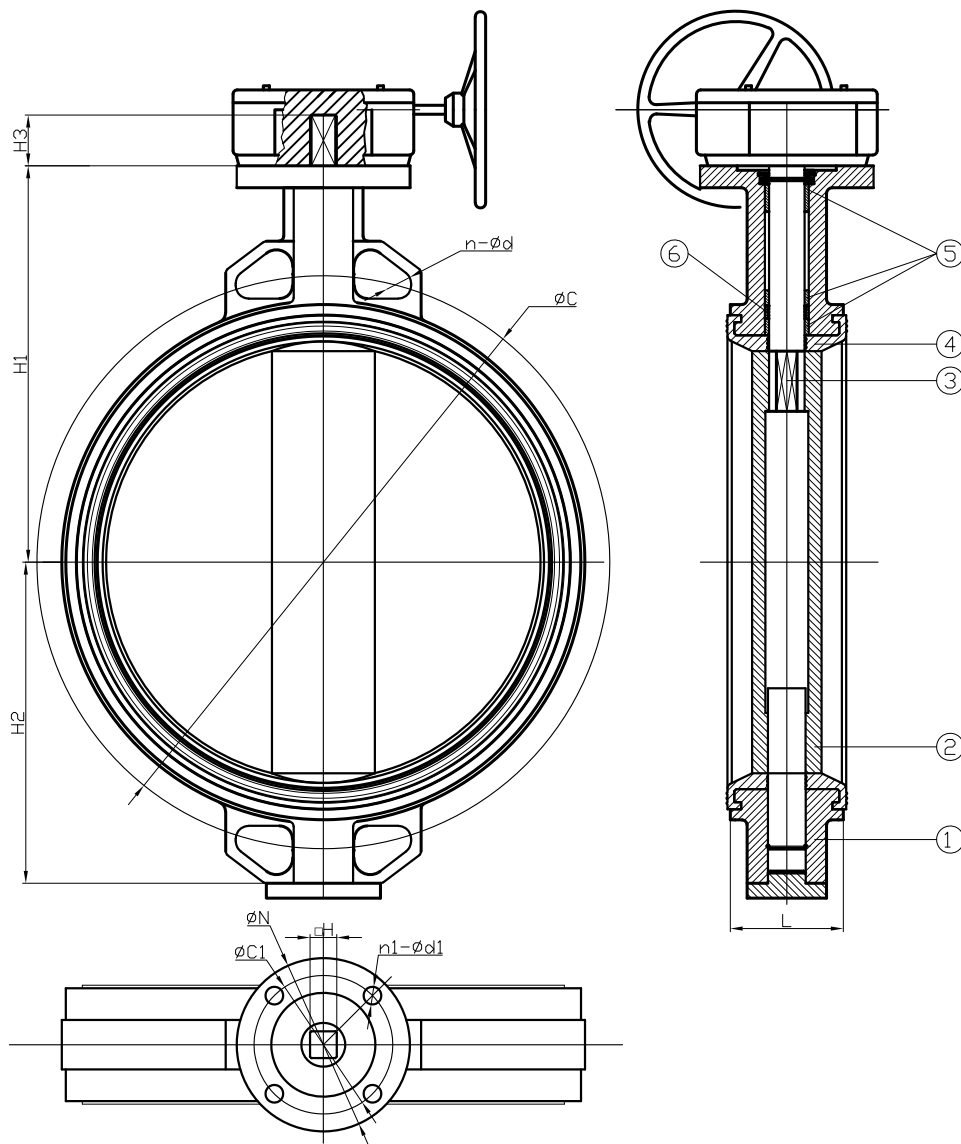

Nominal pressure		PN10	PN16
Test	Strength test	1.5Mpa	2.4Mpa
pressure	Sealing test	1.1Mpa	1.76Mpa
Maximum working		-10℃ to +90℃	-10℃ to +90℃
Suitable Media		W.O.G etc	W.O.G etc

- 1.Design and manufacture according to ISO 5752.
- 2.Face to face according to EN558-1 20 series.
- 3.Flange drilling according to DIN 2501 PN10/16.
- 4.Top flange drilling according to ISO 5211.
- 5.Pressure test according to ISO5208.

DN	L	DIN2501 PN10		DIN2501 PN16		H1	H2	H3	ISO5211				H
		ΦC	n- Φd	ΦC	n- Φd				Top Flange	ØN	ØC1	n1-Ød1	
350	78	460	16-22	470	16-26	328	264	45	F10	125	102	4-12	22
400	102	515	16-26	525	16-30	360	293	51.2	F14	175	140	4-18	27
450	114	585	20-30	585	20-30	400	324	51.2	F14	175	140	4-18	27
500	127	650	20-33	650	20-33	460	350	64.2	F14	175	140	4-18	36
600	154	770	20-36	770	20-36	540	440	70.2	F16	210	165	4-22	36

6	Seal Ring	EPDM			
5	Bushing	PTFE			
4	Seat	EPDM/NBR			
3	Stem	SS420			
2	Disc	Ductile Iron with Nickel			
1	Body	Ductile Iron			
Item	Part name	Material		Q'ty	Remark
DRN	Wang	WEIGHT		MATERIAL	
CHK		SCALE		Butterfly Valve	
APP		DATE	07/22/2024		
hiwa				B20W-HJ	
				REV	20240722a

This document is the property of Huihua Valve Industry Co.
Distribution of this document without the written consent of the owner is strictly forbidden
Failure to comply will incur a liability for damages

http://www.hiwa.cn Website
sales@hiwa.cn Email

86 - 533 - 6077200 Phone
86 - 533 - 6077233 FAX

Huihua Valve Industry co.
No.36 MinAn Road New Hi-Tech Industry
Zone Zibo Shandong China 255088 p.c